


Narrow, narrower

EPS.STOR IN surface light

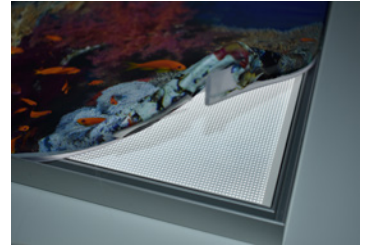

Benefits

- Very flat installation depth possible
- Full-surface and homogeneous backlighting
- Quick fabric changes



Classic applications:


- Stores and trade fairs
- Hotel
- Gastronomy
- Museums
- Offices
- Public buildings

Profile variety with system

LFF20



EPS SYSTEMS

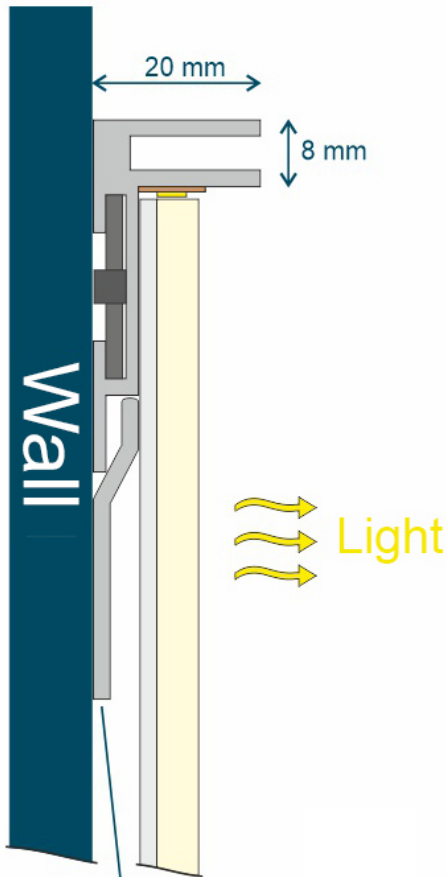

Particularly flat LED tensioned fabric frame for backlighting textile prints for indoor use.



Mounting profile supplied loose

Available with printed and ready-made tensioning fabric on request.

The structure is a combination of PMMA acrylic glass, PCV rigid foam panels, LED strips and an aluminium frame. Full-surface and homogeneous backlighting is achieved.

Different construction depths

The frames are available in construction depths of 20 mm, 35 mm and 50 mm for double-sided applications.



Technical data			
Protection class	IP 40	Minimum dimensions	200x200 mm
Conformity	CE, RoHS	Maximum width	3.050 mm
Fire behavior	Building material class A1 (DIN 4102)	Maximum height	1500 mm (between LEDs)