


Banner confection

When using the expander loops Stormfix:

- **Subtract** 80 mm from the outer dimension of the frame all around.
- Place stainless round eyelets every 200 - 500 mm depending on the banner format
- Recommended round eyelet diameter: 12-20 mm
- Recommended edge distance: 20 mm

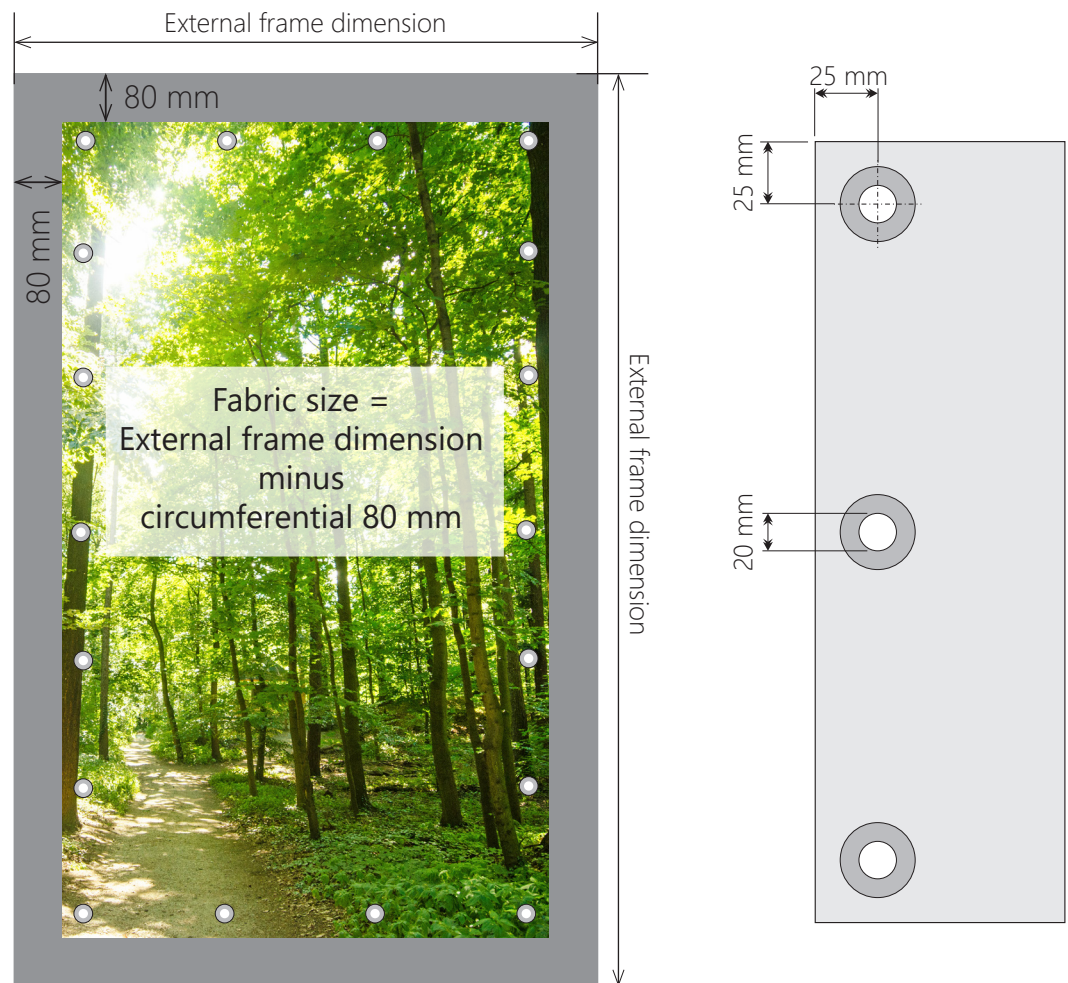

Mounting frame with corner piece

Fix corner piece with screw in the screw hole provided.

Note:

When cutting the profiles to size, subtract 130 mm from the total frame size.


Example:

Frame size 1.000 x 1.000 mm

Cutting size Profile 3-001 870 x 870 mm



Insert corner into the profile

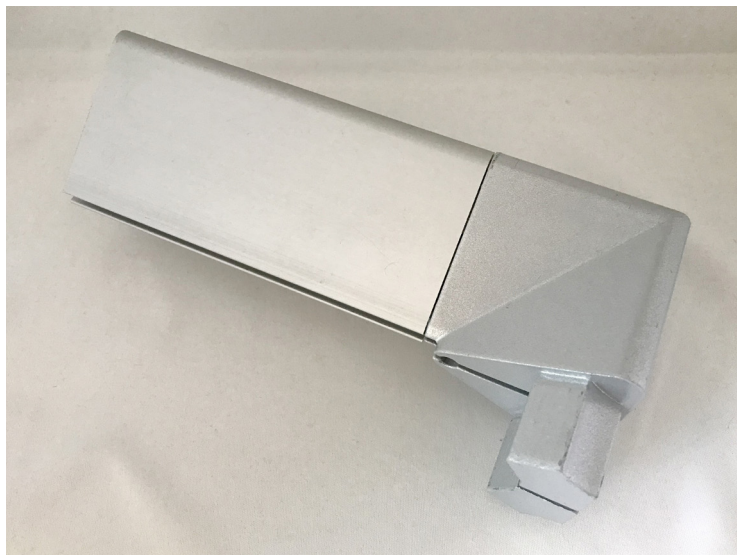


Frame assembly

Please note:

- Banner assembly on page 2
- Max. Distance to the wall brackets: 2.500 mm*

Wall bracket EPS 3-010

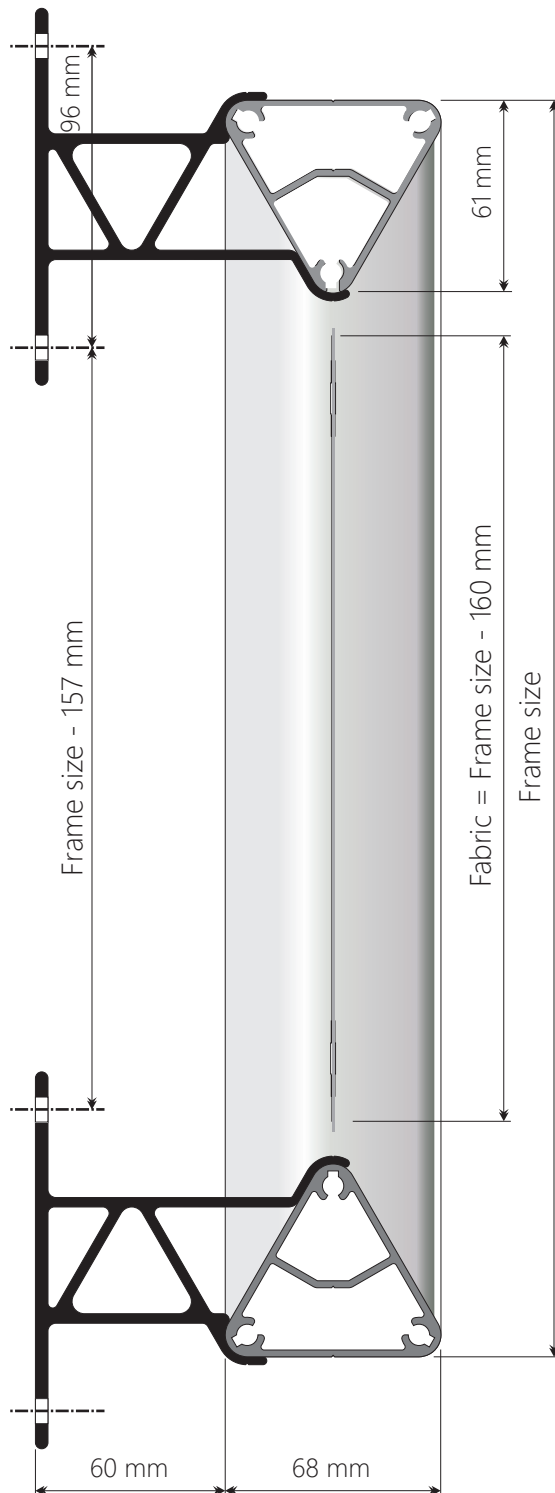

**We cannot assume any liability for the secure fastening of the wall brackets on the various substrates.*

The distance between the wall brackets depends on the wind loads at the installation site and must be checked at your own responsibility!

Frame assembly

Please note:

- Banner assembly on page 2
- Max. Distance to the wall brackets: 2.500 mm*

Wall bracket with screw EPS 3-011




**We cannot assume any liability for the secure fastening of the wall brackets on the various substrates.*

The distance between the wall brackets depends on the wind loads at the installation site and must be checked at your own responsibility!

Mounting aluminum composite panel

- Max. Panel thickness 3 mm
- Mounting only possible with wall bracket EPS 3-011
- Aluminum composite panel is inserted into the side of the profile

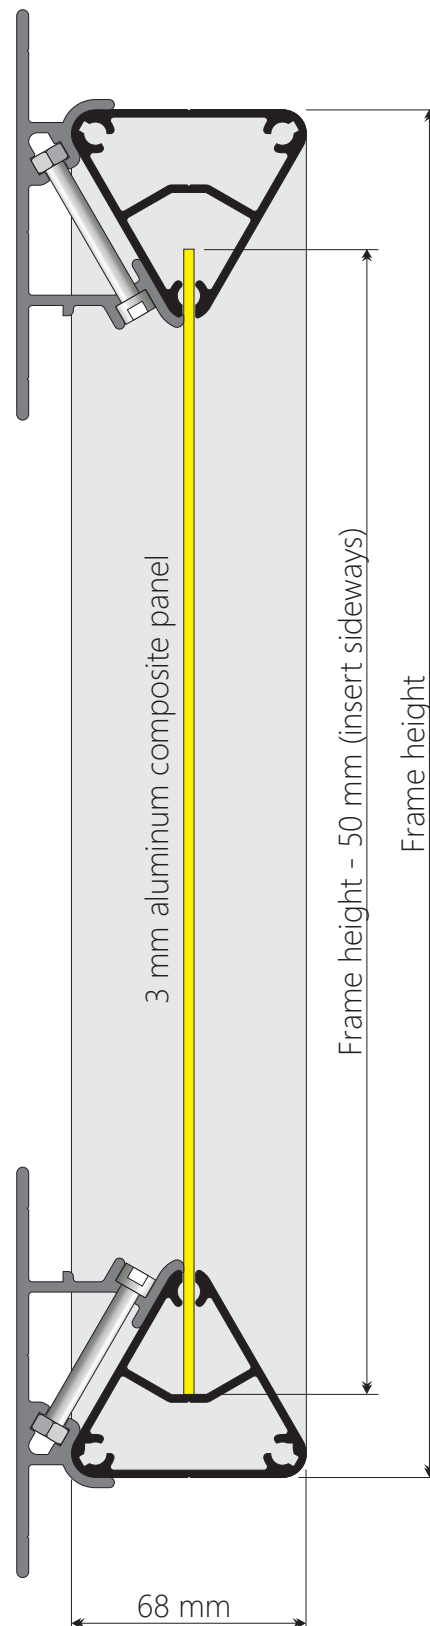

EPS

SYSTEMS

EPS Systems KG
Obere Leimbach 6
57074 Siegen/Germany
Fon +49 (0) 271.338829-00
info@eps-systems.de
www.eps-systems.de